




Saddle Stool

Standard Specifications

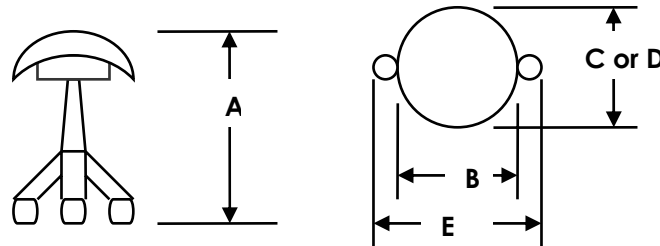

Measurements:

A. Seat Height	26.5" – 33.5"
B. Seat Width	15.5"
C. Seat Depth	14.5"
D. Overall Depth	19"
E. Overall Width	26"

Weight Limit: 250 lbs.

Standard Construction:

Back and Seat Frame: 20% Bio-based molded rigid urethane

Five Star Base: solid injection-molded glass reinforced nylon resin

Control Mechanism: HRPO Hot Rolled Steel meets or exceeds ANSI BIFMA, BS5459 PART 2 (formerly FIRA) and AFRDI standards

Arms: Injection-molded glass reinforced nylon resin with steel inset

Foam: Molded high resilient thermoset foam, CFC and filler free, meets CAL 117 fire standards

Casters: Twin wheel all nylon construction, steel axle and fastening, meets/exceeds Ansi/Bifma standards. Optional urethane tread for hard floors

Gas lift: Pneumatic 300 Newton Force, 8" of travel, meets ANSI/BIFMA requirements